

REFLECTIONS II - 11000-Series SPECIFICATION SHEET

A RECESSED VANITY SINGLE AND MULTI-LAMP T-5 FLUORESCENT LINEAR TRIMLESS FIXTURE WITH DECORATIVE HAND FINISHED SCREWLESS WHITE ACRYLIC DIFFUSER

Type:

Project:

Date:

Lamping: See Chart


Cat. No: DL-111- _____ + _____ + _____ + _____ + _____ + _____ + _____

Fixture Description:

Single and multi-lamp recessed linear fluorescent with decorative hand finished screw less white acrylic diffuser. Suitable for wall or ceiling mount applications.

Features:

- Diffuser: U-shaped white acrylic.** Diffuser attachment friction fit or clips.
- Lamping:** See Chart
- Ballast:** Integral 120V electronic HPF ballast is available as instant on or with dimming capability. All ballasts are UL listed Class P FCC compliant Class A sound rating. Add suffix "DIM" to catalog number to specify dimming ballast.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Rotating Captive Lock T5 Socket.**
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated ballast and wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

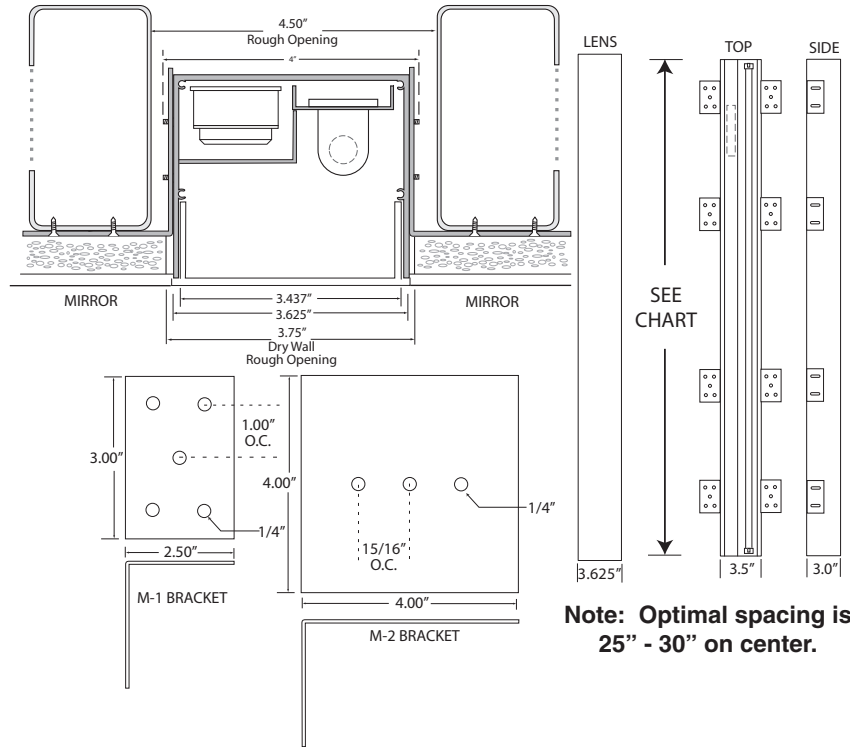

Housing Dimensions:

3.50"W x 3"D
Length: See Chart
Rough-In Dimensions: 4.5"W

Labels:

ETL Listed Damp Location - IC Rated
Conforms to UL1598, Certified Canada
CSA 22.2

Patent:

Design Patent No.
US D473,670 S
Patent No. US 6,616,309 B2

Options:

Voltage: 120V standard, 240 and 277V optional.

REFLECTIONS II VANITY SELECTION GUIDE

TYPE	ITEM NO.	LAMPING	HSG. LENGTH	LENS LENGTH
	DL-11124	1-F-14-T5	24"	24.25"
	DL-11136	1-F-21-T5	36"	36.25"
	DL-11146.5	1-F-28-T5	46.5"	46.75"
	DL-11148	1-F-28-T5	48"	48.25"
	DL-11164.5	2-F-21-T5	64.5"	64.75"
	DL-11172	1-F-21-T5 1-F-28-T5	72"	72.25"
	DL-11188	2-F-28-T5	88"	88.25"
	DL-11196	3-F-21-T5	96"	96.25"
	DL-11124-HO	1-F-24-T5	24"	24.25"
	DL-11136-HO	1-F-39-T5	36"	36.25"
	DL-11146.5-HO	1-F-54-T5	46.5"	46.75"
	DL-11148HO	1-F-54-T5	48"	48.25"
	DL-11164.5-HO	2-F-39-T5	64.5"	64.75"
	DL-11172-HO	1-F-39-T5 1-F-54-T5	72"	72.25"
	DL-11188-HO	2-F-54-T5	88"	88.25"
	DL-11196-HO	3-F-39-T5	96"	96.25"

B = White Acrylic. Dimming available. Universal (0-10V) dimmer available (see below). For Lutron dimming ballast, specify Highlume or Eco-10 as shown below.

TO FORM A

CATALOG NUMBER: DL - 111 - 36 - HO - B - 3000 - CM - M-1 - S - 120

WHICH SPECIFIES:	Model Prefix	Series (11000)	Fixture Length in inches	High Output Ballast	White Acrylic Lens	Color Temp.	Ceiling Mount	Short Bracket	Switch for DIM	Voltage
NOTE: Additional lengths available. Contact factory.		(1)		STD = Standard Ballast		3000 3500 4100	WM = Wall Mount	M-2 = Long Bracket	Specify U = Universal (0-10V) H = Lutron Highlume E = Lutron Eco-10	240 277