

# AVANTI 9100-Series Miniature Flush Mounted Trimless Accent/Task Light SPECIFICATION SHEET

A MINIATURE RECESSED TRIMLESS SINGLE LAMP FLUORESCENT OR 2.5W LED LINEAR FIXTURE, W/ SCREWLESS DECORATIVE U-SHAPED EXTRUDED WHITE ACRYLIC DIFFUSER

Type: \_\_\_\_\_ / Project: \_\_\_\_\_

Lamping: See Chart

Cat. No: DL-91 \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_

Date: \_\_\_\_\_

**Fixture Description:**

Single lamp miniature recessed trimless linear fluorescent or LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser. Suitable for wall or ceiling mount applications.

**Features:**

1. **Diffuser: U-shaped white acrylic.** Diffuser attachment friction fit or clips. Sand blasted white finish available (B-Matte).
2. **Lamping:** T-2 see chart, or LED.
3. **Ballast:** Integral 120V instant-on electronic HPF ballast, UL listed Class P FCC compliant, Class A sound rating.
- LED Fixture:** Contains a 120/24V power supply.
- 9109-LED Light Source: 2.5W LED cluster. 24V AC/DC dimmable.
4. **Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
5. **Captive Lock T2 Socket.**
6. **Housing:** Fixture wall is .0625 extruded aluminum.
7. **White powder coated ballast and wiring cover.**
8. **Fixture has one 1/2" knockout on each end.**
9. **Lenses:** White extruded acrylic Flush Mount (FL) or Overlap Mount (OL). For decorative lenses, consult Avanti T2

Miniature brochure or [www.dreamscapelighting.com](http://www.dreamscapelighting.com)

**Housing Dimensions:**

3.50"W x 3"D

Length: See Chart

**Labels:**

IC or non IC

ETL Listed Damp Location - Conforms to UL1598, Certified Canada CSA 22.2

**Patent:**

Design Patent No.


473,670S

US Patent No. US 6,616,309 B2

**Options:**

**Voltage:** 120 volts standard, 240 and 277V optional (except LED - 120V only).

**Diffusers:** White extruded acrylic custom lenses and colors available. Consult factory.

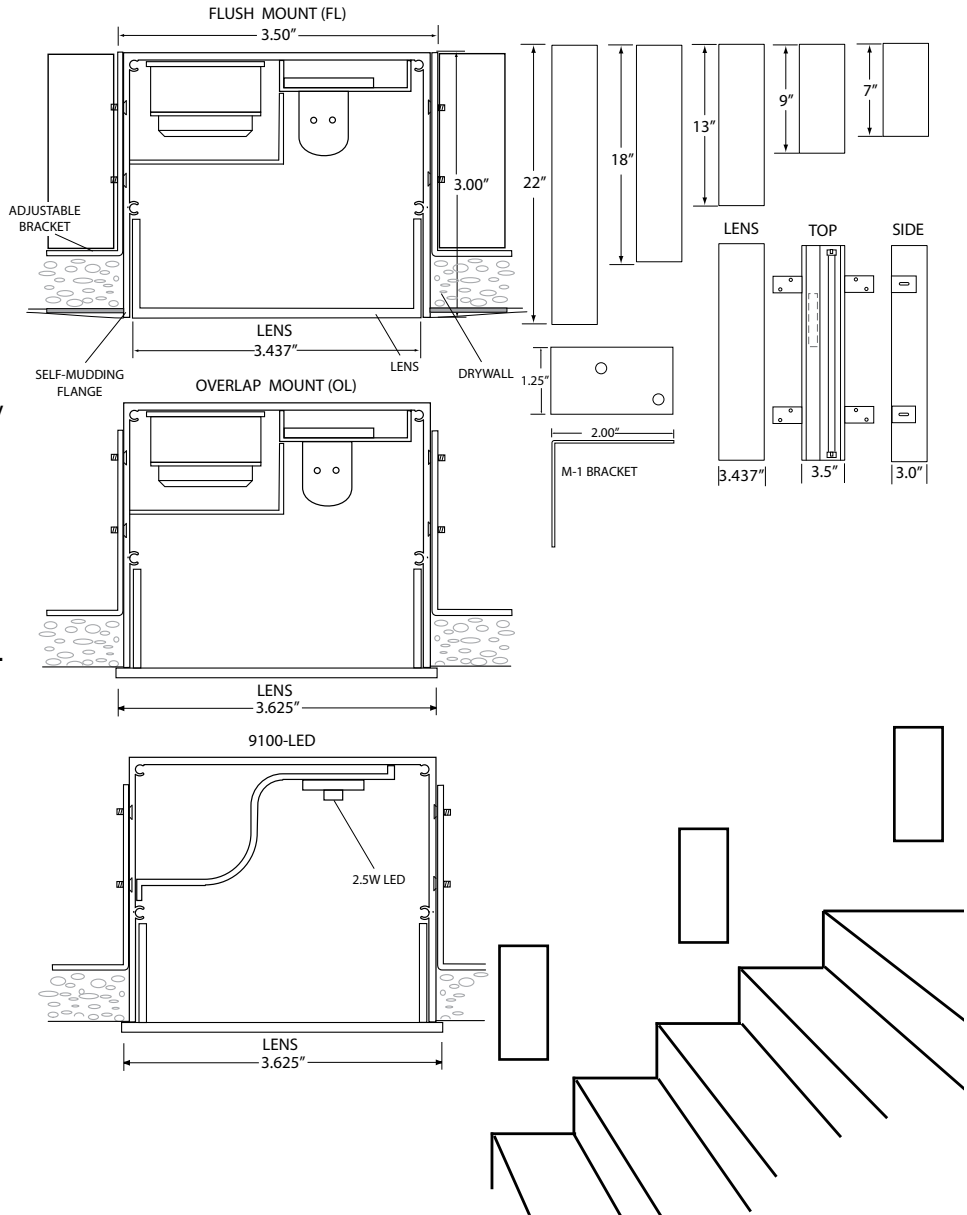

**AVANTI MINIATURE ACCENT/TASK LIGHT SELECTION GUIDE**

Type	Item No.	Specify Lens		Lens Type		Specify Color Temp. 3500*	Specify Voltage 120V**	Lamp Wattage	Lumen Output	Lamp Life (Hours)	Fixture Length
		Overlap OL	Flush FL	B	B-Matte						
DL	9122					3500	120	13W	1200	7,000	22"
DL	9118					3500	120	11W	900	7,000	18"
DL	9113					3500	120	8W	600	7,000	13"
DL	9109					3500	120	6W	400	7,000	9"
DL	9109-LED					3000	120	2.5W	173	25,000	7"