

Project:

**ARIA 9000 LED-Series SPECIFICATION SHEET**

**A Recessed Trimless Dimmable LED Linear Fixture with Screwless Decorative U-Shaped White Acrylic Diffuser and Integral Dimmable Driver**

Date:

Cat. No:

**DLED-90** + + + + + + + + + +

Type:

**Fixture Description:**

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser. Suitable for wall or ceiling mount applications

**Features:**

- 1. Diffuser: High Transmission U-shaped white acrylic.** Diffuser attachment friction fit or clips. Sand blasted white finish available.
- 2. Lamping: 35,000 hour 2.5W (X2) LED light source.** 3.9W per foot, or dual (X2) 3.9W per foot LED light sources.
- 3. Electrical: 120V Lutron constant voltage Highlume A dimmable driver.** Lutron driver single dimmable to 1%.
- 4. Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- 5. Housing:** Fixture wall is .0625 extruded aluminum.
- 7. White powder coated wiring cover.**
- 8. Fixture has one 1/2" knockout on end where ballast is located.**

**Housing Dimensions:**

3.50"W x 3"D

Length: See Chart

**Patent:**




Design Patent No. 473,670S

US Patent No. US 6,616.309 B2

**Options:**

**Voltage: 120V or 277V.**

**L Brackets:** Add suffix "M-1" or "M-2".

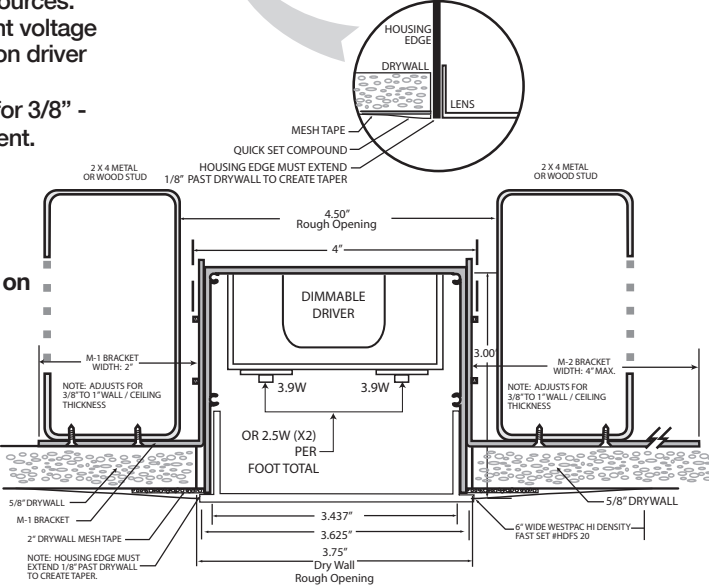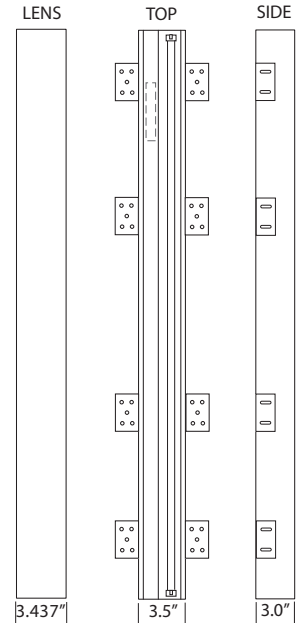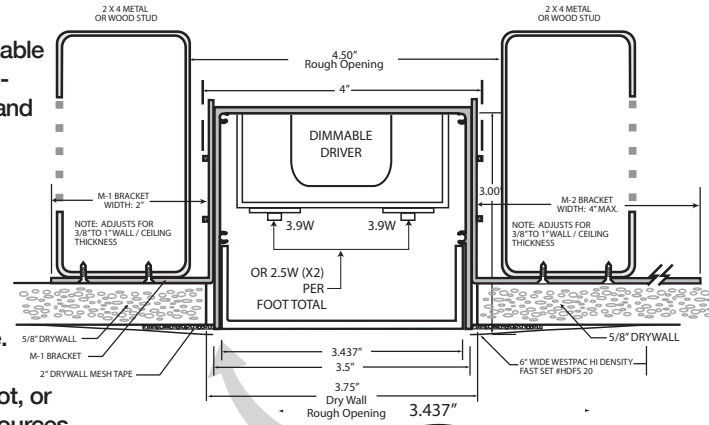

**NOTE: DOUBLE CHANNEL LED SHOWN - SINGLE CHANNEL ALSO AVAILABLE. CONSULT FACTORY**

**OPTIMAL DIMENSIONS**


- 19", 22", 25", 28"
- 31", 34", 37", 40", 43"
- 46", 49", 52", 55"
- 58", 61", 64", 67"
- 70", 73", 76", 79"
- 82", 85", 88", 91"
- 94", 97"

**For longer lengths consult factory**

**LED Specifications**

Wattage per foot	Lumens per ft.	CRI
2.5W	72	70
3.9W	190	75

Color Temps: 2700K, 3000K, 3500K, 6500K

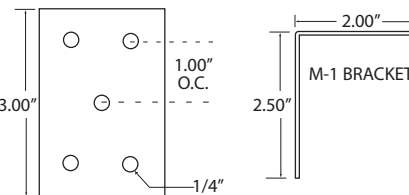

**ARIA 9000 LED SERIES SPECIFICATION GUIDE**

TO FORM A CATALOG NUMBER:	DL	90	49	LED	7.8	2700K	HDA	HTW-B	FL	M-1	WM	120
<b>WHICH SPECIFIES:</b>	Model	Series	Length	Lamp	Watts	Kelvin	Highlume	Lens	Flush	Mounting	Wall Mount	Voltage
<b>NOTE:</b> Additional lengths available.	Prefix	(9000)	19', 22", 25", 28"	Style	per foot	Temp.	1% Dimming	Type	OL	Bracket	CM	240
Contact factory.			31" - 97"		3.9	3500K	A-Series	High Transmission White	Overlap	MOD	Ceiling	277
					2.5	6500K		HTW-SB			Modified Mount	
								High Transmission Sand-Blasted White			Bracket	



©2011 Dreamscape Lighting Mfg., Inc.  
 5521 W. Washington Blvd. • Los Angeles, CA 90016  
 Phone: 323-933-5760 • FAX: 323-933-3607  
 info@dreamscapelighting.com • www.dreamscapelighting.com  
 Specifications subject to change without notice

