

Project:

# DLED-5600 Series Specification Sheet

**LED 35,000 Hour Dimmable Light Strip for Dry Locations  
220 Lumens per Foot, 4.8 Watts per Foot - CRI 80 - 2700K**

Date:

Type:

Cat. No. DLED-5600 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Fixture Description:**

A continuous high power LED dimmable light strip (maximum 4 foot run per feed) that offers a warm, soft, even glow at a huge savings over incandescent, halogen, or fluorescent. Runs cooler than incandescent or halogen, and contains no harmful gasses. 35,000 hour lamp life saves on maintenance and re-lamping costs.

**Construction:**

High power 15 LED diodes per foot wired into rigid LED strip with feed wire pre-wired and attached.

**Electrical:**

12 Volt DC. 4.8 Watts per foot.

Dimmable (contact factory).






**IMPORTANT: LED strips are to be fed from UL Listed Class II constant voltage drivers.**

**Mounting:**

Mounts into covers or other surfaces with screws and/or approved heat transfer double stick tape.

**Applications:**

- Coves • Light Pockets • Accent Lighting
- Cabinet Lighting • Undercabinet Lighting
- Reveal Molding

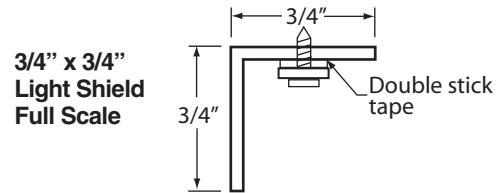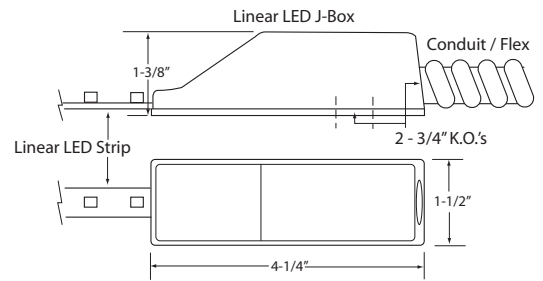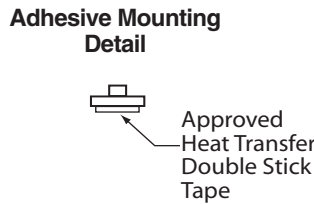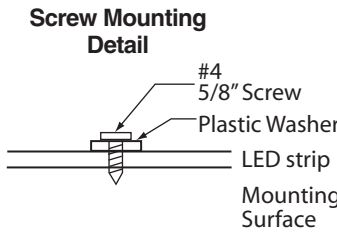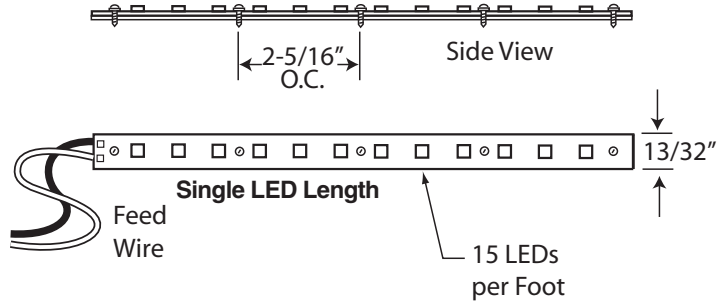

<b>Viewing Angle:</b>	120°
<b>Voltage:</b>	12 Volt DC
<b>Watts:</b>	4.8
<b>Max. Run:</b>	4 feet
<b>Max. Single Length:</b>	4 feet
<b>Mounting:</b>	Screws or approved heat transfer double stick tape.

<b>Secondary Wire Specification</b>	
<b>Max. Load:</b>	50 Watts
<b>Max. Distance:</b>	50 Feet
#14 AWG 2/C Type CM-CL2	
ETL-CM CL3 Standard copper conductor	

Model No.	LED Length	Light Shield	Feed Wire Length	Color Temp.
DLED-5600	12", 24", 36", 48"	LS	3"	2700K
		Aluminum Finish Light Shield	6", 12" 18", 30" Custom	3000K

LED Length      Light Shield      Feed Wire Length      Color Temp.

Ordering Example:

**DLED-5600 - 12" - LS - F3" - 2700**