


Project:


ARIA 9000 LED-Series Vertical L and Inverted U Specifier's Guide

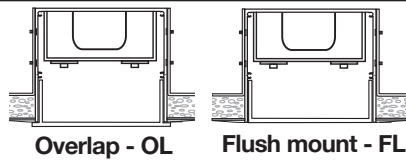


Date:

Type:

Typical Inverted U Fixture Layout

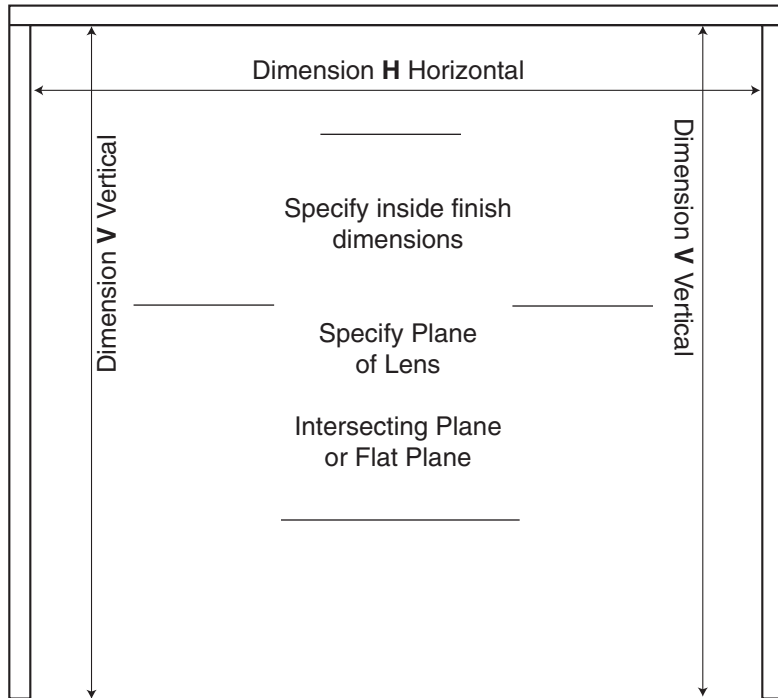

Typical Vertical L Fixture Layout

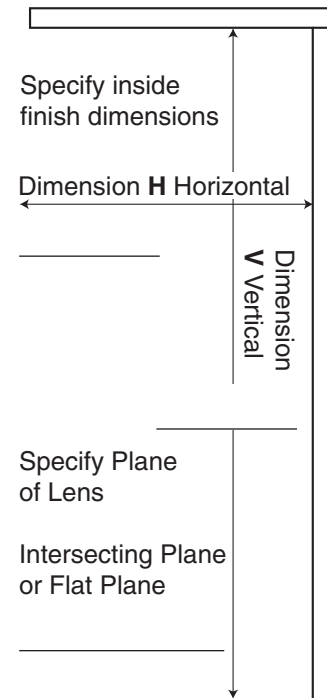

ARIA SPECIFICATION GUIDE

Inverted U Spec Number

DL	90	IU	LED				HDA							
Model Prefix	Series	Inverted U Layout	Intersecting or Flat Plane	Vertical Length (V____")	Horiz. Length (H____")	Vertical Length (V____")	Lamp Style	Watts per Foot	Color Temp	Driver Type	Lens Type	Lens Mount	Short or Long Bracket	Voltage

Vertical L Spec Number

DL	90	VL	LED				HDA						
Model Prefix	Series	Vertical L Layout	Intersecting or Flat Plane	Vertical Length (V____")	Horiz. Length (H____")	Lamp Style	Watts per Foot	Color Temp	Driver Type	Lens Type	Lens Mount	Short or Long Bracket	Voltage

TO FORM AN INVERTED U CATALOG

NUMBER: DL - 90 - IU - IP - VXX - HXX - VXX - LED - 7.8 - 2700 - HDA - HTW-B - FL - M-1 - 120

WHICH SPECIFIES:	Model Prefix	Series (9000)	Inverted U Lamp Layout	Intersecting Plane FP	Vertical Length (XX = inches)	Horiz. Length (XX= inches)	Vertical Length (XX = inches)	Lamp Style	Watts per foot	Color Temp.	Highlume 1% dimming Driver	Lens Type	Flush OL	Short Bracket	Voltage
			(1)	Flat Plane					5.0	3000		HTW-B	Overlap	M-2=	277
									3.9	3500	A-Series	High Trans. White		Long Bracket	
									2.5	6500		HTW-SB			

TO FORM A VERTICAL L CATALOG

NUMBER: DL - 90 - IU - IP - VXX - HXX - LED - 7.8 - 2700 - HDA - HTW-B - FL - M-1 - 120

WHICH SPECIFIES:	Model Prefix	Series (9000)	Inverted U Lamp Layout	Intersecting Plane FP	Vertical Length (XX = inches)	Horiz. Length (XX= inches)	Lamp Style	Watts per foot	Color Temp.	Highlume 1% dimming Driver	Lens Type	Flush OL	Short Bracket	Voltage
			(1)	Flat Plane				5.0	3000		HTW-B	Overlap	M-2=	277
								3.9	3500	A-Series	High Trans. White		Long Bracket	
								2.5	6500		HTW-SB			

NOTE: Additional lengths available.