

Project:

AVANTI 9000-Series T-5 SPECIFICATION SHEET

A RECESSED TRIMLESS SINGLE AND MULTI-LAMP FLUORESCENT LINEAR FIXTURE WITH SCREWLESS DECORATIVE U-SHAPED WHITE ACRYLIC DIFFUSER

Lamping: See Chart

Cat. No: DL-91 _____ + _____ + _____ + _____ + _____ + _____ + _____

Date:

Type:

Fixture Description:

Single and multi-lamp recessed trimless linear fluorescent with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser. Suitable for wall or ceiling mount applications

Features:

- Diffuser: U-shaped white acrylic.** Diffuser attachment friction fit or clips.
- Lamping:** See Chart
- Ballast:** Integral 120V electronic HPF ballast is available as program start, instant on or with dimming capability. All ballasts are UL listed Class P FCC compliant Class A sound rating. Add suffix "DIM" to catalog number to specify dimming ballast.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Rotating Captive Lock T5 Socket.**
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated ballast and wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

Housing Dimensions:

3.50"W x 3"D
Length: See Chart

Labels:

ETL Listed Damp Location - Conforms to UL1598, Certified Canada CSA 22.2


Patent:

Design Patent No. 473,670S
US Patent No. US 6,616.309 B2

Options:

Voltage: 120 volts standard, 240 and 277V optional.

L Brackets: Add suffix "M-1" or "M-2".

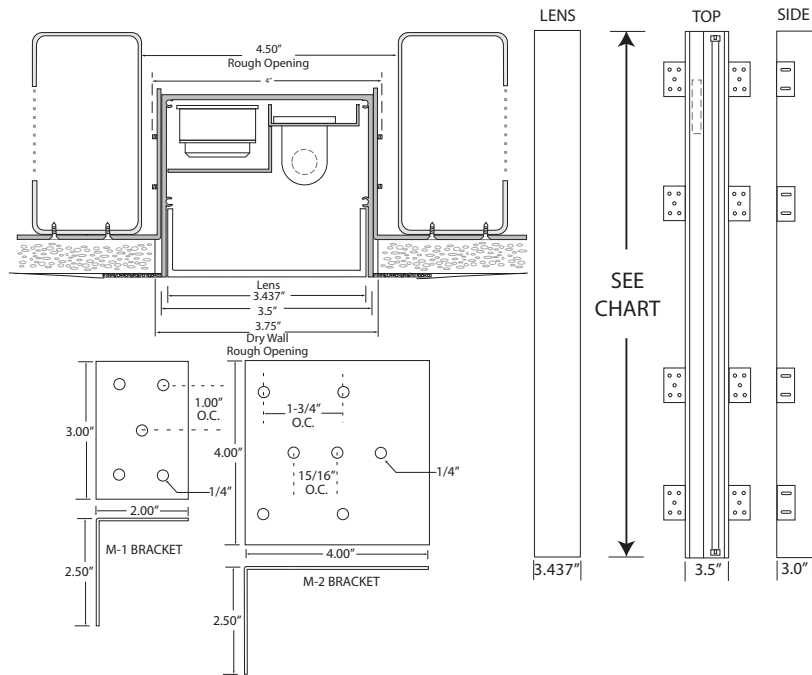

AVANTI SELECTION GUIDE

TYPE	ITEM NO.	LAMPING	LENGTH
	DL-9124	1-F-14-T5	24"
	DL-9136	1-F-21-T5	36"
	DL-9146.5	1-F-28-T5	46.5"
	DL-9148	1-F-28-T5	48"
	DL-9164	2-F-21-T5	64"
	DL-9172	1-F-21-T5 1-F-28-T5	72"
	DL-9188	2-F-28-T5	88"
	DL-9196	3-F-21-T5	96"
	DL-9124-HO	1-F-24-T5	24"
	DL-9136-HO	1-F-39-T5	36"
	DL-9146.5-HO	1-F-54-T5	46.5"
	DL-9148HO	1-F-54-T5	48"
	DL-9164-HO	2-F-39-T5	64"
	DL-9172-HO	1-F-39-T5 1-F-54-T5	72"
	DL-9188-HO	2-F-54-T5	88"
	DL-9196-HO	3-F-39-T5	96"

NOTE: Additional lenses available. Longer lengths available, Universal (0-10V) dimmer available (see below). For Lutron dimming ballast, specify Highlume or Eco-10 as shown below.

AVANTI SPECIFICATION GUIDE

TO FORM A CATALOG NUMBER:	DL	91	36	HO	B	3000	CM	M-1	S	120
WHICH SPECIFIES:	Model Prefix	Series (9000)	Fixture Length in inches	High Output Ballast STD Standard ballast	White Acrylic Lens	Color Temp. 3000 3500 4100	Ceiling Mount WM = Wall Mount	Short Bracket M-2 = Long Bracket	Switch For DIM Specify: U = Universal (0-10V) H = Lutron Highlume E = Lutron Eco -10	Voltage 240 277
NOTE: Additional lengths available. Contact factory.		Lamp (1)								

dreamscape
LIGHTING MFG., INC.

©2010 Dreamscape Lighting Mfg., Inc.
5521 W. Washington Blvd. • Los Angeles, CA 90016
Phone: 323-933-5760 • FAX: 323-933-3607
info@dreamscapelighting.com • www.dreamscapelighting.com
Specifications subject to change without notice

