

REFLECTIONS II - 11000-Series SPECIFICATION SHEET

A RECESSED VANITY SINGLE AND MULTI-LAMP T-5 FLUORESCENT LINEAR TRIMLESS FIXTURE WITH DECORATIVE HAND FINISHED SCREWLESS WHITE ACRYLIC DIFFUSER

Type: _____
 Project: _____
 Date: _____

Lamping: See Chart


Cat. No: DL-111- _____ + _____ + _____ + _____ + _____ + _____ + _____

Fixture Description:

Single and multi-lamp recessed linear fluorescent with decorative hand finished screw less white acrylic diffuser. Suitable for wall or ceiling mount applications.

Features:

- Diffuser: U-shaped white acrylic.** Diffuser attachment friction fit or clips.
- Lamping:** See Chart
- Ballast:** Integral 120V electronic HPF ballast is available as instant on or with dimming capability. All ballasts are UL listed Class P FCC compliant Class A sound rating. Add suffix "DIM" to catalog number to specify dimming ballast.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Rotating Captive Lock T5 Socket.**
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated ballast and wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

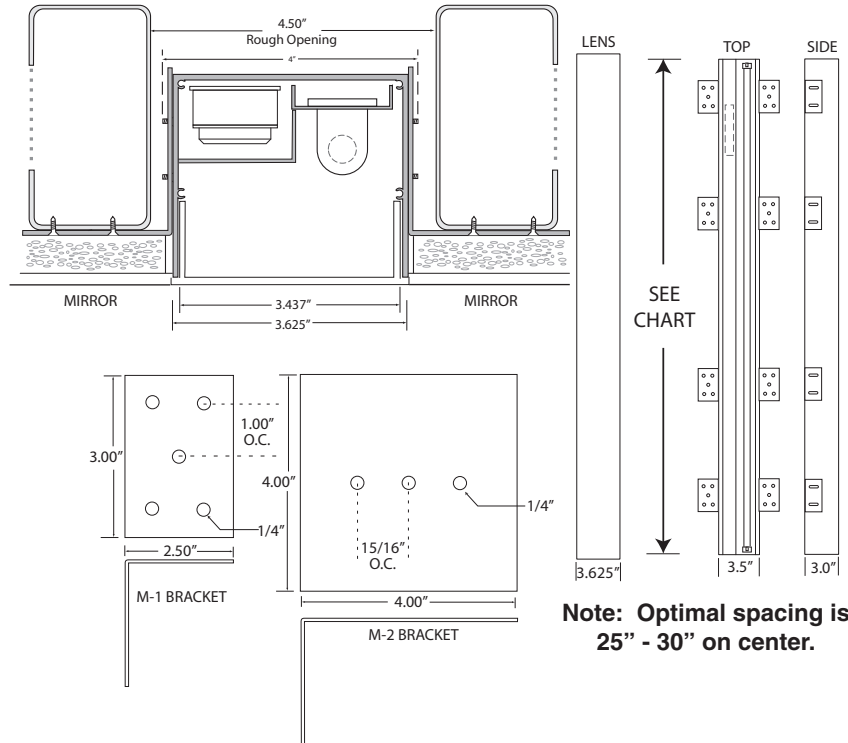

Note: Optimal spacing is 25" - 30" on center.

Housing Dimensions:

3.50"W x 3"D
 Length: See Chart
 Rough-In Dimensions: 4.5"W

Labels:

ETL Listed Damp Location - IC Rated
 Conforms to UL1598, Certified Canada
 CSA 22.2

Patent:

Design Patent No.
 US D473,670 S
 Patent No. US 6,616,309 B2

Options:

Voltage: 120V standard, 240 and 277V optional.

REFLECTIONS II VANITY SELECTION GUIDE

TYPE	ITEM NO.	LAMPING	HSG. LENGTH	LENS LENGTH
	DL-11124	1-F-14-T5	24"	24.25"
	DL-11136	1-F-21-T5	36"	36.25"
	DL-11146.5	1-F-28-T5	46.5"	46.75"
	DL-11148	1-F-28-T5	48"	48.25"
	DL-11164	2-F-21-T5	64"	64.25"
	DL-11176	1-F-21-T5 1-F-28-T5	76"	76.25"
	DL-11188	2-F-28-T5	88"	88.25"
	DL-11196	3-F-21-T5	96"	96.25"
	DL-11124-HO	1-F-24-T5	24"	24.25"
	DL-11136-HO	1-F-39-T5	36"	36.25"
	DL-11146.5-HO	1-F-54-T5	46.5"	46.75"
	DL-11148HO	1-F-54-T5	48"	48.25"
	DL-11164-HO	2-F-39-T5	64"	64"
	DL-11176-HO	1-F-39-T5 1-F-54-T5	76"	76.25"
	DL-11188-HO	2-F-54-T5	88"	88.25"
	DL-11196-HO	3-F-39-T5	96"	96.25"

B = White Acrylic. Dimming available. Universal (0-10V) dimmer available (see below). For Lutron dimming ballast, specify HighLume or Eco-10 as shown below.

TO FORM A																			
CATALOG NUMBER:	DL	-	111	-	36	-	HO	-	B	-	3000	-	CM	-	M-1	-	S	-	120
WHICH SPECIFIES:	Model Prefix	Series (11000)	Fixture Length in inches	High Output Ballast	Matte White Lens	Color Temp.	Ceiling Mount	Short Bracket	Switch for DIM	Voltage									
NOTE: Additional lengths available.			Lamp (1)	STD = Standard Ballast		3000 3500 4100	WM = Wall Mount	M-2 = Long Bracket	Specify U = Universal (0-10V) H = Lutron HighLume E = Lutron Eco-10	240 277									
Contact factory.																			
NOTE: Universal Ballast for Std. lamps only, HighLume for HO lamps only.																			

dreamscape
 LIGHTING MFG., INC.

©2011 Dreamscape Lighting Mfg., Inc.
 5521 W. Washington Blvd. • Los Angeles, CA 90016
 Phone: 323-933-5760 • FAX: 323-933-3607
 info@dreamscapelighting.com • www.dreamscapelighting.com
 Specifications subject to change without notice



010611ref11000_1lamp