

DL-126 Int. SPECIFICATION SHEET

Mesa Interior Illuminator for Damp Location

Lamping: 1 x 20 / 35 Watt MR-11 or 20 Watt ALR

Cat. No. DL-126 Int.- _____ - _____ - _____

Type:

Project:

Date:

Fixture Description:

A cast brass damp location wall sconce utilizing a 20 or 35 Watt MR-11 or 20 Watt ALR lamp for uplighting, downlighting, wall washing or grazing illumination techniques.

Construction:

A solid brass sand casting with a glass vented louvered aperture.

Electrical:

Remote 12-volt power supply.

Mounting:

Solid brass 8/32" phillips screws mount faceplate to housing.

Finishes:

1. Verde, 2. Pewter, 3. Copper Bronze,
4. White, 5. Ancient Bronze, 6. Brass Bronze, 7. Custom, 8. Copper Plate,
9. Ancient Verde.

Lamp:

20 / 35 watt bi-pin MR-11 with front glass or 20 watt ALR lamp.

Lenses:

Linear and diffusion.

Housings:

DL-260: 4" sq., deep steel box.


DL-260-B: 4" sq., deep brass box

DL-261: 2 gang cast aluminum box with extension collar.

DL-262: 2 gang 1/2" raised mounting ring for use with DL-260 housing (included with face plate).

WARNING / CAUTION:

Recommend max. 20 watt lamp in any high traffic pedestrian location.

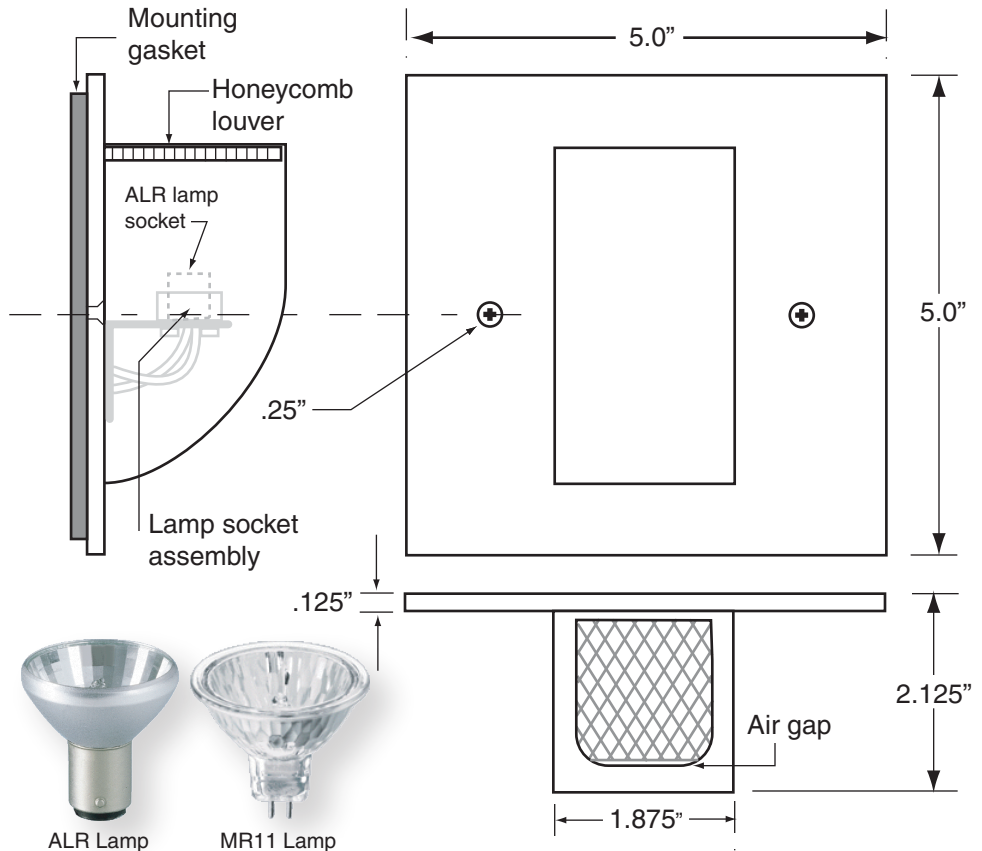

TO FORM A CATALOG NUMBER: WHICH SPECIFIES:

Part #	Lens	Lamp	Finish
DL-126-Int	B	701	6
Mesa fixture	Diffusion lens	20 watt 20° MR-11	Brass Bronze

OPTIONS:

DL-126-Int REQUIRES REMOTE TRANSFORMER

SPECIFY LENS:

- A - LINEAR
- B - DIFFUSION

SPECIFY LAMPS:

- 701 - 20W, 20° MR-11 SPOT
- 702 - 20W, 30° MR-11 FLOOD
- 705 - 20W 6° ALR
- 706 - 20W 18° ALR
- 707 - 20W 32° ALR
- 703 - 35W MR-11 SPOT
- 704 - 35W MR-11 FLOOD

SPECIFY FINISH:

- 1 - VERDE
- 2 - SATIN NICKEL
- 3 - COPPER BRONZE
- 4 - WHITE*
- 5 - ANCIENT BRONZE
- 6 - BRASS BRONZE
- 7 - CUSTOM
- 8 - COPPER PLATE
- 9 - ANCIENT VERDE
- 10 - GREY BRONZE
- 11 - RUST BROWN*
- 12 - BLACK*
- 13 - PEWTER

* Powder Coat