

DL-126 Ext. SPECIFICATION SHEET

Mesa Exterior Illuminator for Wet Location

Lamping: 1 x 20 Watt MR-11 or ALR

Cat. No. DL-126 Ext.- _____ - _____ - _____

Cat. No. DL-126 Ext.-SST - _____ - _____ - _____

Type:

Project:

Date:

Fixture Description:

A cast brass wet location wall sconce utilizing a 20 Watt MR-11 or ALR lamp for uplighting, downlighting, wall washing or grazing illumination techniques.

Construction:

A solid brass sand casting with a glass sealed louvered aperture.

Electrical:

Remote 12-volt power supply or recessed solid state transformer.

Mounting:

Solid brass 8/32" phillips screws mount faceplate to housing.

Finishes:

1. Verde, 2. Satin Nickel, 3. Copper Bronze, 4. White*, 5. Ancient Bronze, 6. Brass Bronze, 7. Custom, 8. Copper Plate, 9. Ancient Verde, 10. Grey Bronze, 11. Rust Brown*, 12. Black*, 13. Pewter

* Powder Coat

Lamp:

20 watt bi-pin MR-11 with front glass or 20 watt ALR lamp.

Lenses:

Linear and diffusion.


Housings:

DL-260: 4" sq., deep steel box.

DL-260-B: 4" sq., deep brass box

DL-261: 2 gang cast aluminum box with extension collar.

DL-262: 2 gang 1/2" raised mounting ring for use with DL-260 housing (included with face plate)

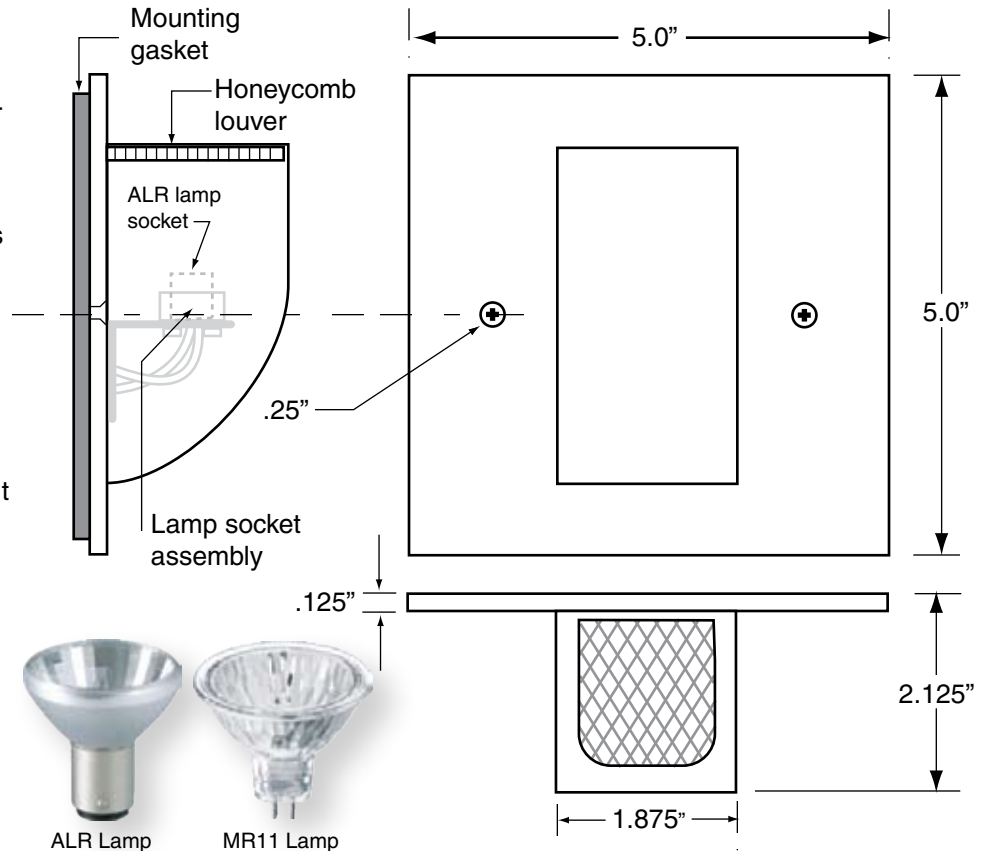

ALR Lamp



MR11 Lamp

TO FORM A CATALOG NUMBER: WHICH SPECIFIES:

Part #	Lens	Lamp	Finish
DL-126-Ext	B	701	6
Mesa fixture	Diffusion lens	20 watt 20° MR-11	Brass Bronze

OPTIONS:

DL-126-Ext. REQUIRES REMOTE TRANSFORMER

DL-126-Ext.-SST INCLUDES SOLID STATE TRANSFORMER

SPECIFY LENS:

- A - LINEAR
- B - DIFFUSION

SPECIFY LAMPS:

- 701 - 20W, 20° MR-11 SPOT
- 702 - 20W, 30° MR-11 FLOOD
- 705 - 20W 6° ALR
- 706 - 20W 18° ALR
- 707 - 20W 32° ALR

SPECIFY FINISH:

- 1 - VERDE
- 2 - SATIN NICKEL
- 3 - COPPER BRONZE
- 4 - WHITE*
- 5 - ANCIENT BRONZE
- 6 - BRASS BRONZE
- 7 - CUSTOM
- 8 - COPPER PLATE
- 9 - ANCIENT VERDE
- 10 - GREY BRONZE
- 11 - RUST BROWN*
- 12 - BLACK*
- 13 - PEWTER

* Powder Coat